

Mi • Light[®]

User Instruction

IP Rate: IP54

RGB+CCT LED Waterproof Downlight

Model No.: FUT063 / FUT069

Features



RGB+CCT
16 Millions of colors to choose



Color temperature
2700~6500K



Dimmable
Saturation control



2.4G RF wireless transmission
technology



Remote control
Control distance 30m



Smart phone App control
Mi-Light WiFi ibox is needed



Waterproof and dustproof
grade IP54

Parameters

Model No.: FUT069

Power: 15W

Input Voltage: AC100~240V 50/60Hz

Color temperature: 2700K~6500K

Luminous Flux: 1200LM

Light Efficiency: 80LM/W

CRI: >80


PF: >0.5

Lifespan: 50000 hours

Beam Angle: 120°

IP Rate: IP54

Material: Aluminum

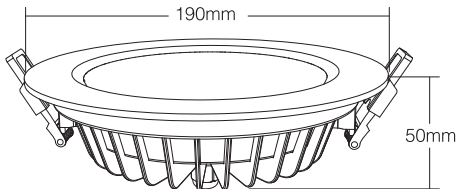

Hole Size: $\varnothing$ 175~180mm

Model No.: FUT063

Power: 6W

Input Voltage: AC100~240V 50/60Hz

Color temperature: 2700K~6500K

Luminous Flux: 500LM

Light Efficiency: 80LM/W

CRI: >80


PF: >0.5

Lifespan: 50000 hours

Beam Angle: 120°

IP Rate: IP54





Material: Aluminum

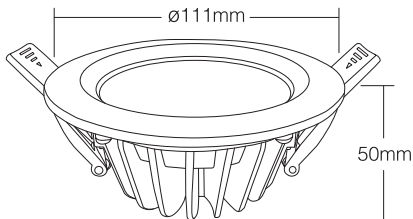

Hole Size: $\varnothing 90 \sim 100\text{mm}$

Instructions

1. Please open the hole on the ceiling according to the correct size of Diagram 1.
2. Connect the driver properly according to the wire connection Diagram 2. And then put the driver and wire into the ceiling from the hole.
3. Push in the two spring elements, make sure that they are deployed and anchored on the back of the ceiling Diagram 3 and 4.




Link / Unlink

Compatible with these remote controls
(Purchased separately)



FUT089



FUT092



FUT088




FUT095




FUT096



B8



B4 / T4



B3 / T3



B0



NOTE:

Lighting can be working after linking with remote;
for more details, pls read the remote instruction.

1. The installation and wiring must be qualified by qualified person; Operating according to standard procedures and instructions. Amateurs can not disassemble and install lights.
2. Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.
3. The lighting will be heating on working, pls do not cover the lighting housing.
4. The waterproof and dustproof rate is IP54, just working on water drop and spray protection, pls do not put the light into water long time.
5. Power supply is not waterproof, pls put it at dry area.



Made in China

